




Lundhs Emerald Aztec Technical Data Sheet

Lundhs Emerald has been tested on the Aztec Ventilated Rainscreen System to comply with BS 8298 in accordance with standard test methods for building envelopes as specified in CWCT Technical Notes 75 & 76:

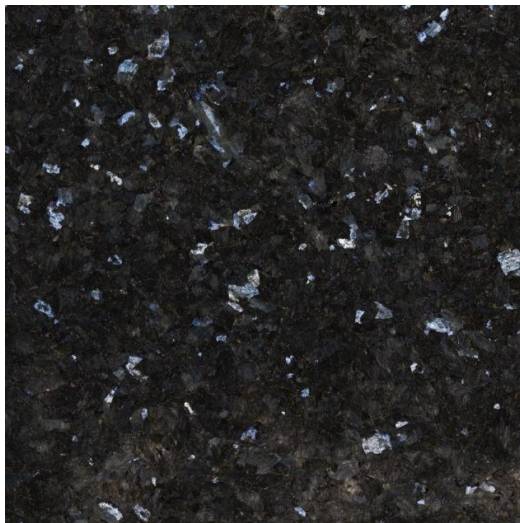

Tested Size 1200 x 600 x 30mm

- Soft body impact - 120Nm - No damage observed. Class 1 Serviceability.
- Soft body impact - 350Nm – No damage observed. Negligible risk - safety.
- Soft body impact - 500Nm – No damage observed. Negligible risk - safety.
- Hard body impact – 10Nm – Class 1 Negligible risk - safety.

Lundhs Emeralds can be used on all floors, including ground floor, at a size of 1200 x 600mm (grid size: 1200mm x 600mm)

Standard Grid sizes for this stone are:

1200 x 600mm
1200 x 450mm
1200 x 300mm
900 x 600 mm
900 x 450 mm
900 x 300 mm
600 x 300 mm
600 x 450 mm

Finishes available on this stone are:

Honed
Sandblasted
Tooled
Flamed

Stone Cladding Systems Ltd
October 2023

Head Office: Stone Cladding Systems, Park House, Alkington DE6 3DH
Tel: 01335361000 Website: www.scs-stone.co.uk
Bankers: Lloyds Bank, Dig Street, Ashbourne, DE6 1DY

Directors: J.J.Kennedy